

bizhub PRO C1060/C1070 DATASHEET


To accomplish the smooth transition to digital, take a look at the bizhub PRO C1060/C1070. Offering modularity for optimum colour consistence as well as highest media flexibility, Konica Minolta's digital colour presses are perfect choices for key operator environments and unattended operation. Both combine a superb image quality with entry-level finishing capabilities and impress with their performance of up to 3,316 (bizhub PRO C1060) or up to 3,907 A4 pages per hour (bizhub PRO C1070).





YOUR ADVANTAGES WITH THE bizhub PRO C1060 SERIES



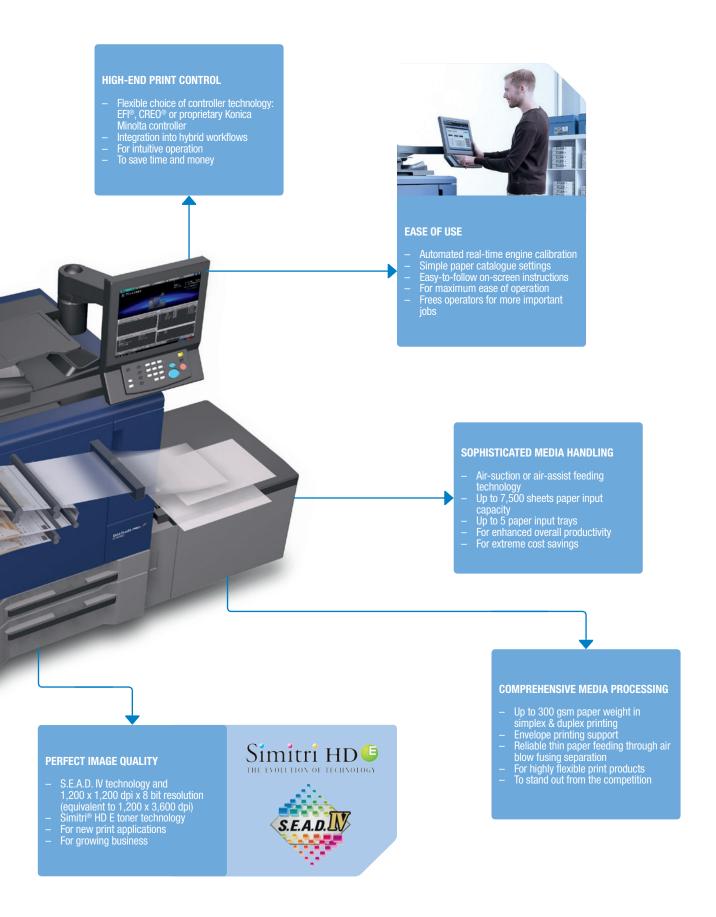

Recommended configurations



Technical specifications

SYSTEM SPECIFICATIONS

| Resolution | 1,200 x 1,200 dpi x 8 bit |
|----------------------------------|------------------------------|
| | 1,200 x 3,600 dpi equivalent |
| Paper weight | 62-300 gsm |
| Duplex unit | Non-stack type; 62-300 gsm |
| Paper sizes | 330 x 487 mm |
| Maximum image area | 323 x 480 mm |
| Paper input capacity | Standard: 1,500 sheets |
| | Max.: 7,500 sheets |
| Paper output capacity | Max.: 3,100 sheets |
| Main unit dimensions (W x D x H) | 760 x 903 x 1,072 mm |
| Main unit weight | 291 kg |
| | |

PRODUCTIVITY

| bizhub PRO C1070/P | |
|------------------------|-----------|
| A4 - max. per minute | 71 ppm |
| A3 - max. per minute | 38 ppm |
| SRA3 - max. per minute | 36 ppm |
| A4 - max. per hour | 3,907 pph |
| A3 - max. per hour | 2,107 pph |
| SRA3 - max. per hour | 1,976 pph |
| bizhub PRO C1060 | |
| A4 - max. per minute | 60 ppm |
| A3 - max. per minute | 33 ppm |
| SRA3 - max. per minute | 31 ppm |
| A4 - max. per hour | 3,316 pph |

1,792 pph

1,681 pph

CONTROLLER

A3 - max. per hour

SRA3 - max. per hour

| Internal EFI Fiery Controller | IC-415 |
|--|--------|
| External EFI Fiery Controller | IC-308 |
| External CREO Controller | IC-309 |
| Internal Konica Minolta own controller | IC-602 |

SCANNER SPECIFICATIONS

| Scan speed A4 | Up to 70 opm |
|-----------------|---------------------------------------|
| Scan resolution | 600 x 600 dpi |
| Scan modes | TWAIN scan; Scan-to-HDD; Scan-to-FTP; |
| | Scan-to-SMB; Scan-to-eMail |
| Scan formats | TIFF (single and multi page); PDF |

COPIER SPECIFICATIONS

| Gradations | 256 gradations |
|-----------------|------------------------------|
| FCOT | Less than 8 sec. (colour A4) |
| Magnification | 25-400%, in 0.1% steps |
| Mutliple copies | 1-9,999 |

ACCESSORIES

| Original cover | OC-509 |
|-----------------------------------|--------|
| Automatic document feeder | DF-626 |
| Working table | WT-511 |
| Heating unit for main body trays | HT-511 |
| Air assist paper feed unit | PF-602 |
| Heating unit for PF-602 | HT-504 |
| Air suction paper feed unit | PF-707 |
| Heating unit for PF-707 | HT-506 |
| Large capacity tray | LU-202 |
| Heating unit for LU-202 | HT-503 |
| Bypass tray | MB-506 |
| Relay unit | RU-509 |
| Humidification unit | HM-102 |
| Output tray | OT-502 |
| Booklet finisher | FS-612 |
| Staple finisher | FS-531 |
| 2/4-hole punch kit for FS-612/531 | PK-512 |
| 2-hole punch kit for FS-612/531 | PK-513 |
| Post inserter for FS-612/531 | PI-502 |
| Envelone fuser | FF-103 |

All specifications refer to A4-size paper of 80 gsm quality.
 The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.

The stated life expectancy of each consumable is based on specific operating system contiguisations.
 The stated life of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4).
 The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
 Some of the product illustrations contain optional accessories.
 Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.

Konica Minolta does not warrant that any prices or specifications mentioned will be error-free.

All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.